

# Haiku H Series Outdoor

## TECHNICAL SPECIFICATIONS




Specially engineered for wet locations, Haiku outdoor fans keep your porch, patio, or pool deck feeling cool and breezy, rain or shine.

### THE CEILING FAN, REINVENTED


- **Airfoils** — Aircraft-grade aluminum; 52-inch, 60-inch, or 84-inch (1.3 m, 1.5 m, or 2.1 m) fan sweep
- **Motor** — EC motor with digital inverter drive
- **Controller** — Intuitive handheld remote control with seven distinct speeds, plus Sleep, Timer, and Whoosh® modes
- **Environment** — Outdoor use; IPX2
- **Ambient Operational Temperature** — 32° to 104° F (0° to 40° C)
- **Stainless Steel Components** — Protect against moisture
- **Accessories** — Optional extension tube lengths and a Stabilizer Kit are available for ceilings 14 feet (4.3 meters) or taller.



#### Airfoil Finishes



#### Hardware Finishes






Technical Specifications — Universal Mount			
<b>Diameter of fan sweep (B)</b>	52 in. (1321 mm)	60 in. (1524 mm)	84 in. (2134 mm)
<b>Model number<sup>1</sup></b>	FR127A-U0F10-3H03-XXXXX-XXXP000	FR150A-U0F10-3H03-XXXXX-XXXP000	FR213A-U0G10-3H03-XXXXX-XXXP000
<b>Weight<sup>2</sup></b>	15.5 lb (7 kg)	17.5 lb (8 kg)	26 lb (11.8 kg)
<b>Watts (min/max)</b>	2.3/21.7 W	2.8/30.5 W	3.7/56.1 W
<b>Operating voltage</b>	100–240 VAC, 1 Φ, 50–60 Hz		
<b>Max speed (7 speeds)</b>	200 RPM		135 RPM
<b>Sound level at max speed<sup>3</sup></b>	< 35 dBA		
<b>Included extension tubes</b>	20 in. (508 mm)	32 in. (813 mm)	
<b>Height (A)<sup>4</sup></b>	28.4 in. (721 mm)	40.4 in. (1026 mm)	
<b>Optional extension tubes<sup>5</sup></b>	7 in. (178 mm)	48 in. (1219 mm)	60 in. (1524 mm)
<b>Height (A)<sup>4</sup></b>	15.4 in. (391 mm)	56.4 in. (1433 mm)	68.4 in. (1737 mm)

Technical Specifications — Standard Mount		
<b>Diameter of fan sweep (B)</b>	52 in. (1321 mm)	60 in. (1524 mm)
<b>Model number<sup>1</sup></b>	FR127A-A2F10-3H03-XXXXX-XXXP000	FR150A-A2F10-3H03-XXXXX-XXXP000
<b>Weight<sup>2</sup></b>	16.5 lb (7.5 kg)	18.5 lb (8.4 kg)
<b>Watts (min/max)</b>	2.3/21.7 W	2.8/30.5 W
<b>Operating voltage</b>	100–240 VAC, 1 Φ, 50–60 Hz	
<b>Max speed (7 speeds)</b>	200 RPM	
<b>Sound level at max speed<sup>3</sup></b>	< 35 dBA	

Technical Specifications — Low Profile Mount		
<b>Diameter of fan sweep (B)</b>	52 in. (1321 mm)	60 in. (1524 mm)
<b>Model number<sup>1</sup></b>	FR127A-S0F10-3H03-00471-XXXP000	FR150A-S0F10-3H03-XXXXX-XXXP000
<b>Weight<sup>2</sup></b>	16.5 lb (7.5 kg)	18.5 lb (8.4 kg)
<b>Watts (min/max)</b>	2.2/15.4 W	1.6/31.4 W
<b>Operating voltage</b>	100–240 VAC, 1 Φ, 50–60 Hz	
<b>Max speed (7 speeds)</b>	179 RPM	177 RPM
<b>Sound level at max speed<sup>3</sup></b>	< 35 dBA	

<sup>1</sup> "X" indicates a placeholder number, which varies depending on finish options, where the fan is installed, and other factors.  
<sup>2</sup> The actual, precise fan weight will vary based on individual component weights and finishing.  
<sup>3</sup> Actual results of sound measurements in the field may vary due to sound reflective surfaces and environmental conditions.  
<sup>4</sup> Add 0.8 in. (20 mm) for 84-inch (2134 mm) fans.  
<sup>5</sup> Optional extension tube lengths packaged separately. The 7 in. (178 mm) tube is not available for 84-inch (2134 mm) fans.

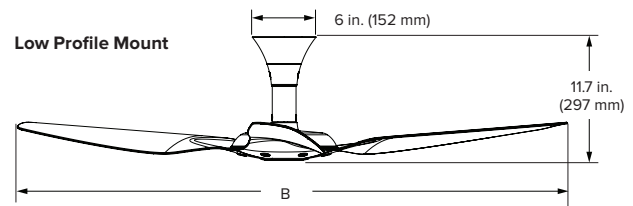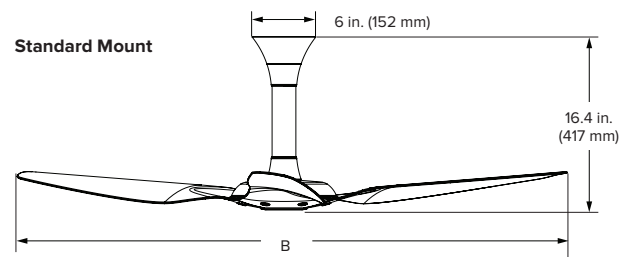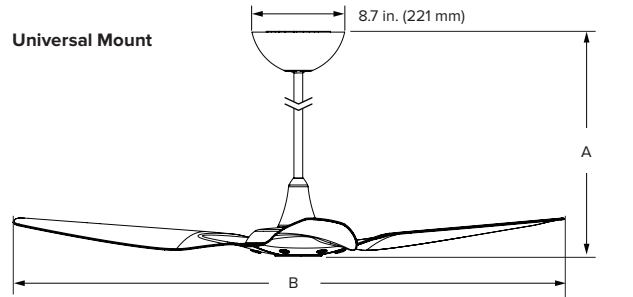

Lead times may vary.  
 Specifications subject to change without notice.  
 Warranty period and terms vary by country and application.  
 To view your full warranty, visit [bigassfans.com/product-warranties](http://bigassfans.com/product-warranties)



AMERICAS  
 HAIKUHOME.COM  
 855-694-2458

CANADA  
 HAIKUHOME.COM/CA  
 844-924-4277

AUSTRALIA  
 HAIKUHOME.COM/AU  
 1-300-244-277

SINGAPORE  
 HAIKUHOME.COM/SG  
 +65 6709 8500

MALAYSIA  
 +603 5565 0888