

Haiku Luxe Series Outdoor

TECHNICAL SPECIFICATIONS



Elevate your style and comfort with Haiku Luxe Series fans. Available in a variety of bold finishes, these fans establish a new standard for quality, design, technology, and convenience.

QUALITY, ELEGANCE, AND EFFICIENCY

- **Airfoils** — Aircraft-grade aluminum; 52-inch, 60-inch, or 84-inch (1.3 m, 1.5 m, or 2.1 m) fan sweep
- **Motor** — EC motor with digital inverter drive
- **Controls** — Intuitive handheld remote control with seven distinct speeds, plus Sleep, Timer, and Whoosh® modes
- **Environment** — Outdoor use; IPX2
- **Ambient Operational Temperature** — 32° to 104° F (0° to 40° C)
- **Stainless Steel Components** — Protect against moisture
- **Accessories** — Optional extension tube lengths and a Stabilizer Kit are available for ceilings 14 feet (4.3 meters) or taller.



Airfoil Finishes

258 Black	259 White
471 Oil-Rubbed Bronze	470 Satin Nickel
	531 Brushed Aluminum


Hardware Finishes

258 Black	259 White
AS Satin Nickel	AO Oil-Rubbed Bronze

Technical Specifications — Universal Mount

Diameter of fan sweep (B)	52 in. (1321 mm)	60 in. (1524 mm)	84 in. (2134 mm)
Model number ¹	FR127A-U0F10-3H03-0XXXX-XXXP000	FR150A-U0F10-3H03-0XXXX-XXXP000	FR213A-U0G10-3H03-04XXX-XXXP000
Weight ²	15.5 lb (7 kg)	17.5 lb (8 kg)	26 lb (11.8 kg)
Watts (min/max)	2.3/21.7 W	2.8/30.5 W	3.7/56.1 W
Operating voltage	100–240 VAC, 1 Φ, 50–60 Hz		
Max speed (7 speeds)	200 RPM		135 RPM
Sound level at max speed ³	< 35 dBA		
Included extension tubes	20 in. (508 mm)	32 in. (813 mm)	
Height (A) ⁴	28.4 in. (721 mm)	40.4 in. (1026 mm)	
Optional extension tubes ⁵	7 in. (178 mm)	48 in. (1219 mm)	60 in. (1524 mm)
Height (A) ⁴	15.4 in. (391 mm)	56.4 in. (1433 mm)	68.4 in. (1737 mm)


Universal Mount

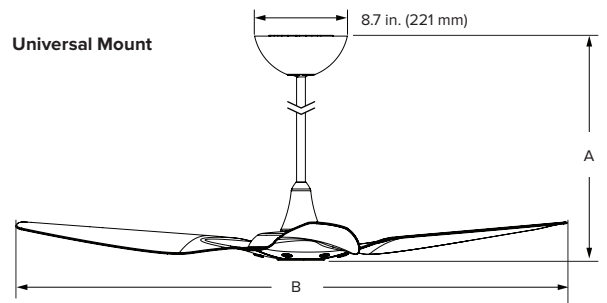

Technical Specifications — Standard Mount

Diameter of fan sweep (B)	52 in. (1321 mm)	60 in. (1524 mm)
Model number ¹	FR127A-A2F10-3H03-0XXXX-XXXP000	FR150A-A2F10-3H03-0XXXX-XXXP000
Weight ²	16.5 lb (7.5 kg)	18.5 lb (8.4 kg)
Watts (min/max)	2.3/21.7 W	2.8/30.5 W
Operating voltage	100–240 VAC, 1 Φ, 50–60 Hz	
Max speed (7 speeds)	200 RPM	
Sound level at max speed ³	< 35 dBA	


Standard Mount

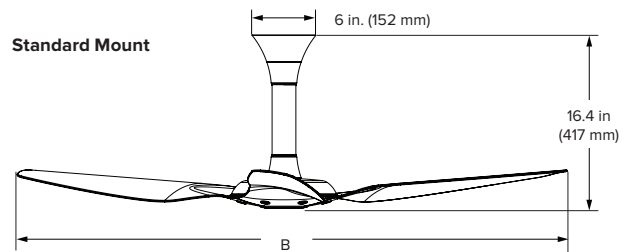

Technical Specifications — Low Profile Mount

Diameter of fan sweep (B)	52 in. (1321 mm)	60 in. (1524 mm)
Model number ¹	FR127A-S0F10-3H03-0XXXX-XXXP000	FR150A-S0F10-3H03-0XXXX-XXXP000
Weight ²	16.5 lb (7.5 kg)	18.5 lb (8.4 kg)
Watts (min/max)	2.2/15.4 W	1.6/31.4 W
Operating voltage	100–240 VAC, 1 Φ, 50–60 Hz	
Max speed (7 speeds)	179 RPM	177 RPM
Sound level at max speed ³	< 35 dBA	

Low Profile Mount

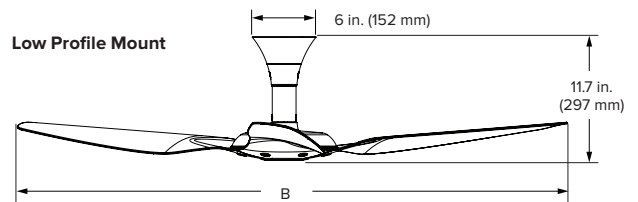

¹"X" indicates a placeholder number, which varies depending on finish options, where the fan is installed, and other factors.

²The actual, precise fan weight will vary based on individual component weights and finishing.

³Actual results of sound measurements in the field may vary due to sound reflective surfaces and environmental conditions.

⁴Add 0.8 in. (20 mm) for 84-inch (2134 mm) fans.

⁵Optional extension tube lengths packaged separately. The 7 in. (178 mm) tube is not available for 84-inch (2134 mm) fans.



Lead times may vary.
Specifications subject to change without notice.
Warranty period and terms vary by country and application.
To view your full warranty, visit bigassfans.com/product-warranties



AMERICAS
HAIKUHOME.COM
855-694-2458

CANADA
HAIKUHOME.COM/CA
844-924-4277

AUSTRALIA
HAIKUHOME.COM/AU
1-300-244-277

SINGAPORE
HAIKUHOME.COM/SG
+65 6709 8500

MALAYSIA
+603 5565 0888